


# **PNUMATIC/HYDRAULIC/ON-OFF DELUGE VALVE**

**SERIES NO:- 801**

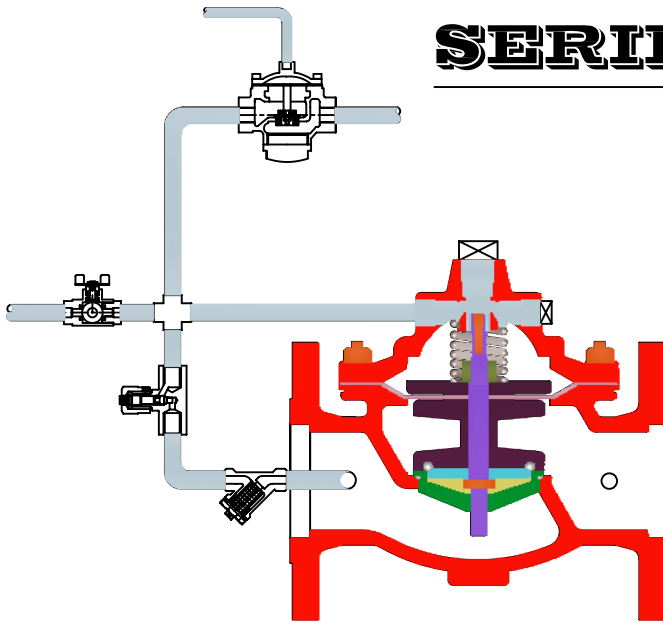

## **COMPONENTS**

1. Main Valve - Deluge
2. 100M (Pneumatic/Hydraulic Control) Flo-Clean Strainer
3. Fixed Orifice Restriction
4. Ball Valve

**Valve sizes approved by Underwriter's Laboratories:**

4", 6", 8", 10"

Cast Iron 125# and Cast Steel 150#,  
with either Copper tubing and Brass fittings, or  
Stainless Steel tubing and fittings.

## **VALVE FUNCTION:-**

- Valve closes when air/Hyd.pressure is applied to the cover of control 2.
- Valve Opens when air/hyd.pressure is relieved from the cover of control 2.
- Manual by-pass allows manual opening of the valve.

*The NU-TECH ACV 801 deluge valve meets all requirements for Indian Listed, fire protection service. Valve opens on demand to provide water flow to the fire protection sprinkler system. Pilot system can be hydraulically, pneumatically or manually operated. Opening of valve is by loss of control pressure or by manual opening.*

*Perfect Solution For Any Type Of Liquide Applicaton  
From*

**Nutech Valves**

**37, Shreeji Industrial Estate, Raypur Mill Compound, Saraspur, Ahmedabad - 24**

**Ph..( O ) :- 079 - 29292112, 32923375 Fax :- 079 - 22133122**

**E-Mail :- [sales@nutechvalves.com](mailto:sales@nutechvalves.com) Website :- [www.nutechvalves.com](http://www.nutechvalves.com)**

**AN ISO 9001:2000 Certified Co.**