


PRESSURE REGULATOR (HP)-263

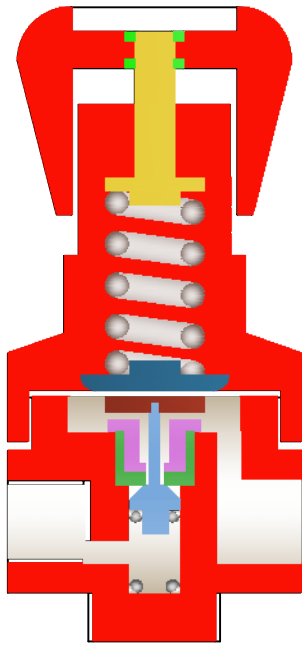

TYPICAL APPLICATION

*RESEARCH LABS
LOW FLOW PURGE SYSTEMS
PILOT PLANT OPERATIONS
MEDICAL INSTRUMENTS
DEAD WEIGHT TESTER
INDUSTRIAL CONTROLS
GAS AND LIQUID SAMPLING*

TECHNICAL SPECIFICATION

*MEDIA ----- ALL GASES COMPATIBLE WITH MATERIALS OF COSTRUCTION
FOR OTHER MEDIA CONSULT WITH FECTORY*

RATED INLET PRESSURE:- 6000 PSIG (STAINLESS STEEL BODY)

OUTLET PRESSURE RANGE:- 4 - 50, 4 - 150, 4 - 250, 4 - 500 PSIG

PROOF PRESSURE:- 150% MAXIMUM OPERATING

BURST PRESSURE:- 400% MAXIMUM OPERATING

*MATERIALS:- BODY - STAINLESS STEEL, ALLUMINUM OR BRASS
BONNET - STAINLESS STEEL
40 MICRON FILTER - SS 316
SEAT - KEL. F 81 / PTFE
SEAL - BUNA - N
DIAPHRAGM - BUNA - N / METAL*

FLOW CAPACITY:- Cv = .08

AMBIENT OPERATING AND FLUID MEDIA TEMPERATURE:- -55°C TO 75°C

A:- BUBBLE TIGHT

WEIGHT:- 3 LBS (1.36 KG)

PORT SIZE:- 1/4", 3/8", 1/2" NPTT

Nutech Valves

37, Shreeji Industrial Estate, Raypur Mill Compound, Saraspur, Ahmedabad - 24

Ph..(O) :- 079 - 29292112, 32923375 Fax :- 079 - 22133122

E-Mail :- sales@nutechvalves.com Website :- www.nutechvalves.com

AN ISO 9001:2000 Certified Co.