


SAFTY RELIEF VALVE

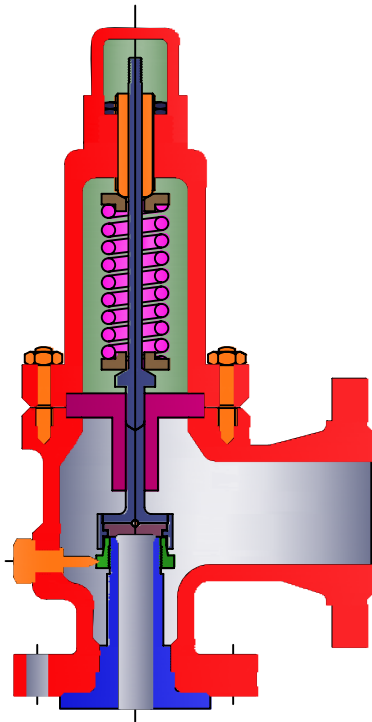

- ◆ *Spring Loaded Safty Rilief Valve*
- ◆ *Full Lift Pop Type Design*
- ◆ *Close Bonnet Close Cap*
- ◆ *Open Bonnet With Cap & Liver*
- ◆ *Close Bonnet With Liver*
- ◆ *Close Bonnet With Packed Liver*
- ◆ *Metal Seat*
- ◆ *Soft Seat With PTFE & Viton*
- ◆ *Stallited Nozzle & Disc*
- ◆ *Bellows Seal Safty Relief valve*

TECHNICAL SPACIFICATION

INLET SIZE	:- <i>1" x 2" Through 8" x 10" ANSI Flanged</i>
SCREW TYPE SIZE	:- <i>$\frac{1}{2}$" To 3"</i>
INLET RATING	:- <i>ANSI Class 150# To 2500#</i>
ORIFICE SIZE	:- <i>Sixteen Sizes-D Through T</i>
TEMPERATURE RANGE	:- <i>-450° F To 1500° F</i>
PRESSURE	:- <i>5 to 6500 PSIG</i>

APPLICATION

Air / Gas / Vapor / Liquid / Steam

STANDARD

As per API / ASME & IBR

Nutech Valves

37, Shreeji Industrial Estate, Raypur Mill Compound, Saraspur, Ahmedabad - 24

Ph..(O) :- 079 - 29292112, 32923375 Fax :- 079 - 22133122

E-Mail :- sales@nutechvalves.com Website :- www.nutechvalves.com

AN ISO 9001:2000 Certified Co.